MODULO

MY LIFE STYLE, MY DESIGN

AMSTEL - Sangria®

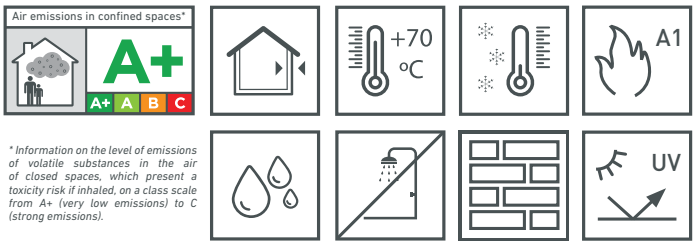

* Information on the level of emissions of volatile substances in the air of closed spaces, which present a toxicity risk if inhaled, on a class scale from A+ (very low emissions) to C (strong emissions).



For OUTDOOR / INDOOR use

finished surface with joints

EAN: 5945763012400

Product details

Dimensions (cm)	Thickness (cm)	Coverage/box (m²)	Number of pieces/box	Weight/box (kg)
L = 21.2 H = 6.0	1.5 *	1	63	23.3

** for a more natural appearance, the dimensions may vary*

Palletizing

No. boxes/row	No. rows/pallet STND	No. boxes/pallet STND	STND pallet height (cm)	No. rows/pallet DS	Nr. boxes/palet DS
10	5	50	120	-	-

Recommended accessories and average consumption

Adhesives: MODULO Colle Extra® (C2TeS1)/ MODULO Exterior/Interior Adhesive® (D2) (kg/m²)	Grout: MODULO Joint® (kg/m²)	Joint size
5	3.5	10

MODULO DECORATIVE SOLUTIONS SRL - 29, 22 Decembrie 1989 st, 401113 TURDA, ROMANIA • Tel: (+40)264 305607
MODULO SAS - 4, parc du Durteint, 77160 PROVINS, FRANCE • Tel: (+33)160 671338 • Email: office@modulo.fr

Allowed surfaces for installation

Plaster, plasterboard, bricks, concrete, concrete bricks, plastered/rendered surfaces, wood, ceramic tiles.
The surface on which the products are installed must be in good condition, dry, stable and protected against water infiltration.
Exceptions: The products should not be installed on the floor, ceiling, on surfaces or in areas with high humidity, or at temperatures higher than 70 °C.

Product storage

The product is stored only in spaces that are protected from moisture or bad weather.

Installation instructions

USE RECOMMENDED PERSONAL PROTECTION MEASURES DURING THE PRODUCT INSTALLATION PROCESS

RECOMMENDED REQUIRED TOOLS



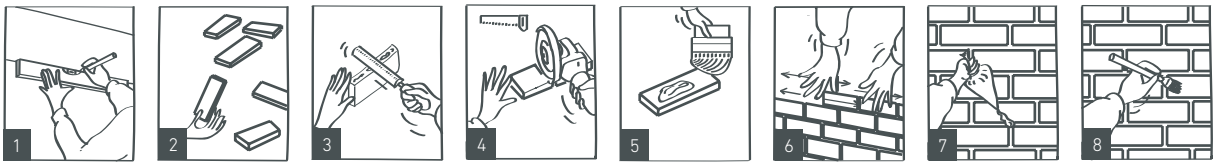

1. Draw level lines.
2. Preselect the decorative tiles.
3. Smooth the edges and scrape the back of the decorative tiles for better adhesion.
4. Cut the tiles to the desired size, if necessary.
5. Apply the adequate adhesive for the support, to both the back of the tiles and to the installation surface.
6. Apply the decorative tiles to the wall, with a distance between them for the joint grout application.
7. Fill the joints with grout to three quarters of the joint's depth.
8. Smooth the grout.

Maintenance

1. Use only PH-neutral detergent solutions for cleaning the tiles.
2. Clean the tiles with a vacuum cleaner but avoid direct contact of the nozzle with the tiles.
3. Do not clean the tiles with high-pressure devices. Otherwise, you may risk damaging them.
4. For deep stains seek professional advice. Avoid using non-specific cleaning products.

Use the QR code for detailed installation instructions:

MODULO DECORATIVE SOLUTIONS SRL - 29, 22 Decembrie 1989 st, 401113 TURDA, ROMANIA • Tel: (+40)264 305607
MODULO SAS - 4, parc du Durteint, 77160 PROVINS, FRANCE • Tel: (+33)160 671338 • Email: office@modulo.fr

V.1.3 / 2023.05 AB